


Container Lifting Beam - CT

Product information

The CT series lifting beam is designed for lifting ISO freight containers. On the crane side, it has a 2-leg chain suspension with a ring for single hooks in accordance with DIN 15401. Four chains are attached to the lower container corners on the load side. The chains can be shortened so that containers with a non-symmetrical centre of gravity can also be lifted along the longitudinal axis of the container. The lifting beam is supplied in the colour RAL 3000 (fire red) as standard, but other colours are also available on request. You can also send us an enquiry for other intermediate sizes and load capacities.

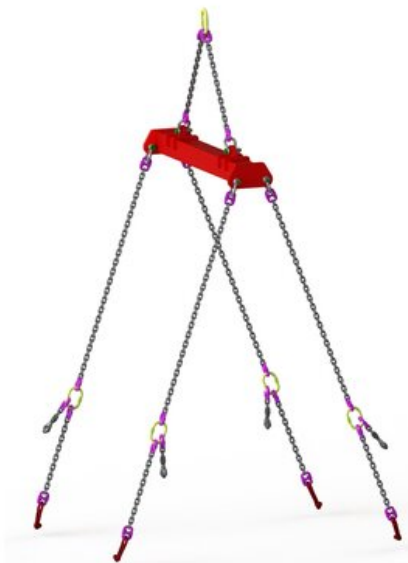

| Part Code | WLL ton | Length mm | L mm | B mm | H max mm | H min mm | AH mm | AB mm | D mm | ΔSP mm | Weight kg | Delivery time |
|------------|---------|-----------|--------|-------|----------|----------|-------|-------|-------|--------|-----------|---------------|
| 6205CT1210 | 12 | 3,048 | 2,850 | 2,580 | 5,043 | 4,633 | 200 | 110 | 1,509 | 545 | 403 | 49 |
| 6205CT2020 | 20 | 6,096 | 5,898 | 2,580 | 6,586 | 5,788 | 260 | 140 | 1,646 | 667 | 721 | 49 |
| 6205CT2030 | 20 | 9,144 | 8,946 | 2,580 | 7,923 | 6,934 | 260 | 140 | 1,646 | 676 | 782 | 49 |
| 6205CT2040 | 20 | 12,192 | 11,994 | 2,580 | 8,723 | 6,718 | 260 | 140 | 1,646 | 1,061 | 947 | 49 |

Blueprint

