


## Lifting Chain Winner pro Pewag, Flex 200

### Product information

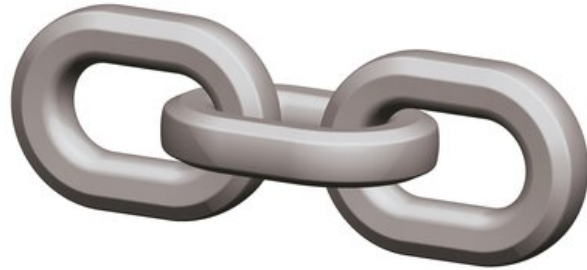

Profile steel chain in grade 12 for lifting.

**Features:** Strong, flexible and efficient.

**Material:** Alloy steel

**Marking:** Manufacturer ID, grade

**Temperature range:** -40°C up to +200°C.

**Finish:** Light grey powdercoated.

**Note:** Not to be heat-treated.

**Safety factor:** 4:1

**Grade:** 12

Part Code	Chain diameter mm	WLL ton	Min. Breaking force kN	b1 min.	b2 max.	dn mm	t mm	Weight kg	Delivery time
204100700000050	7	2.36	92.6	10	26	7	22	1.36	20
204100800000050	8	3	118	11.2	29	8	25	1.64	20
204101000000050	10	5	196	14.2	37	10	33	2.7	20
204101300000050	13	8	314	18.6	50	13	41	4.8	20
204101600000050	16	12.5	491	22.8	60	16	51	7.17	20

# Blueprint

