

## Lifting Triangle

### Product information



**General:** The lifting triangle has the same function as a short beam or a spreader. Given working load limits are valid for a maximum top sling angle of 90°. For top angles between 90°-120° working load limit shall be reduced by 30%. All lifting triangles are supplied with 2 shackles according to table. Working load limit in the centre shackle hole is equal to the working load limit of the shackle according to the table.

**Design:** Cut sheet metal. Wear plates and spacers for the shackles.


**Proof:** Batch proof 2 x WLL.

**Material:** Plate of high-strength structural steel.

**Marking:** WLL and CE-marking.

**Finish:** Yellow painted.

**Note:** Other loads and dimensions are available on request.

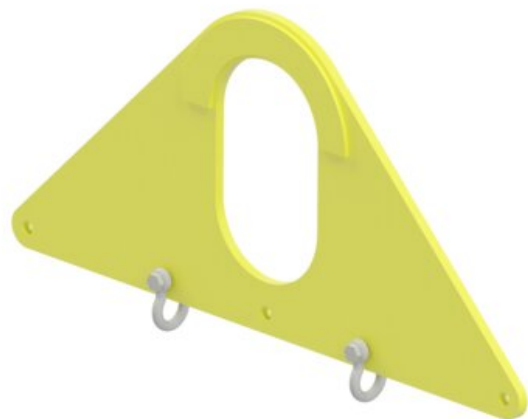

Part Code	WLL ton	Shackle	A mm	B mm	H mm	K mm	L mm	Weight kg	Delivery time
620566700209	2	11.311	250	150	340	290	700	13	49
620566700409	4	11.311	250	150	360	290	700	20	49
620566700609	6	11.311	250	150	375	290	700	31	49
620566701009	10	11.311	300	180	460	360	870	55	49
620566701509	15	11.311	300	180	490	360	870	74	49
620566702009	20	11.311	300	180	525	360	870	100	49

# Blueprint

