


## Comparison of pewag lashing chains in G8, G10, G12

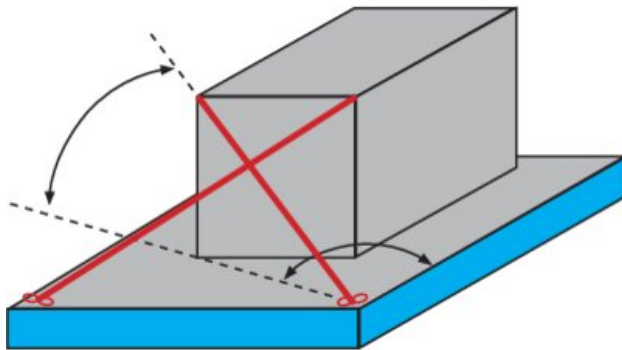

### Product information

Grade: 12

### Delivery time

20

20

20

## Technical data

When using 4 lashing chains of type	Permitted load weight when using 4 lashing chains $\alpha = 35^\circ$ , $\beta = 30^\circ$ , friction coefficient $\mu = 0,3$ ZRS GB	Permitted load weight when using 4 lashing chains $\alpha = 35^\circ$ , $\beta = 30^\circ$ , friction coefficient $\mu = 0,3$ ZRSW G10	Permitted load weight when using 4 lashing chains $\alpha = 35^\circ$ , $\beta = 30^\circ$ , friction coefficient $\mu = 0,3$ ZRSWP G12
Lashing chain 8 mm	14,100	17,600	21,150
Lashing chain 10 mm	22,200	28,200	35,250
Lashing chain 13 mm	35,250	47,200	56,400